NASA Technical Memorandum 105895

[8-21-92 E7361

Determination of Parameters of a New Method for Predicting Alloy Properties

Guillermo Bozzolo Analex Corporation Brook Park, Ohio

and

John Ferrante Lewis Research Center Cleveland, Ohio

October 1992



DETERMINATION OF PARAMETERS OF A NEW METHOD FOR PREDICTING ALLOY PROPERTIES

Guillermo Bozzolo⁽¹⁾ and John Ferrante⁽²⁾

- (1) Analex Corporation, 3001 Aerospace Parkway, Brook Park, OH 44142-1003
- (2) National Aeronautics and Space Administration, Lewis Research Center, Cleveland, OH 44135

Abstract

Recently, a semiempirical method for alloys based on equivalent crystal theory was introduced (Phys. Rev. B45,943(1992)). The method successfully predicts the concentration dependence of the heat of formation and lattice parameter of binary alloys. In this report, a study of the parameters of the method is presented, along with new results for γ Fe-Pd and γ Fe-Ni alloys.

Recently, a new method for calculating alloy properties was introduced by Bozzolo, Ferrante and Smith (BFS)¹. The method is based on the ideas of equivalent crystal theory (ECT) for defect formation energies in elemental solids² and uses only pure metal and two alloy properties as input data. In our previous work, we applied the method to the study of the heat of formation as well as the concentration dependence of the lattice parameter of several fcc binary alloys^{1,3}. More recent applications of BFS deal with the study of the energetics of bcc alloys⁴ and theoretical modelling of the atomic force microscope for bimetallic the sample interactions⁵. Also, as a consequence of the ideas underlying the foundation of BFS, we were able to derive a new set of sum rules which allow for the direct calculation of bulk alloy properties from pure component properties⁶.

The simplicity of the method relies on the basic assumption that the energy of each non-equivalent atom is described as a superposition of two separate contributions: a strain energy that deals with the structural changes and a chemical energy that takes into account the changes in chemical composition. The calculation of the first term, the strain energy, is a straightforward application of equivalent crystal theory for pure elements: it is computed as if the neighbors of a given atom were of the same atomic species. Thus, no information for the alloy is needed except for neighbor locations. The calculation of the chemical energy follows an ECT-like format with the introduction of two additional 'perturbative' parameters which mimick the interaction between atoms of different atomic species in the overlap region and account for the changes in the electron density due to the presence of the other atomic species¹. For binary alloys A-B, two such parameters are needed, Δ_{AB} and Δ_{BA} , which are obtained from two experimental (or theoretical) alloy properties as input¹. Our previous work^{1,3-6} only cited the application of BFS to several problems in order to

verify its ability to predict properties of interest. We now give a more detailed discussion concerning the properties of Δ_{AB} and Δ_{BA} and provide a set of values for general use.

In our previous work^{1,3-5}, Δ_{AB} and Δ_{BA} were determined by requiring that the predicted heats of solution in the dilute limit reproduced the experimental values. These quantities were computed by making use of the cluster expansion method⁷ which relates properties of ordered compounds to those of disordered. We used it to predict the heat of formation for disordered alloys. Although this scheme has been very successful in a large number of applications⁸⁻¹⁰, there is still some uncertainty regarding the truncation criteria used in the expansion¹¹. This arbitrariness results in fluctuations of the predicted values of Δ_{AB} and Δ_{BA} . In some cases, the choice of a basis set on which the expansion is based could lead to theoretical predictions that differ greatly from the experimental ones, even if the physical quantity used as input (i.e., the heat of solution) is accurately reproduced. We will give an example of this along with providing a set of parameters Δ_{AB} and Δ_{BA} , used in our previous work^{1,3-5}, and comment on the sensitivity of these parameters to the choice of truncation scheme used in the cluster expansion.

Table 1 displays the pure element parameters needed for computing the strain and chemical energy contributions^{1,2} and Table 2 shows the parameters Δ_{AB} and Δ_{BA} for several fcc binary alloys of the elements listed in Table 1, obtained by using the tetrahedron approximation⁸ (i.e., all the clusters contain only nearest-neighbors). In all cases we used the experimental heats of solution in the dilute limit as input, as this quantity is readily available for most alloys¹². Previous applications of this nearest-neighbor model to total energy of bulk alloys can be found in the work of Connolly and Williams⁸, Terakura et al⁹ and Takizawa et al¹⁰. The ordered structures included in order to determine the many-body

potentials in the cluster expansion are the fcc $L1_0$ and $L1_2$ structures. It was found that this basis set gives good results for all the alloys listed in Table 2. In tables 3 and 4 we display the corresponding parameters for bcc pure elements and binary alloys respectively.

To the fcc binary alloys discussed in Ref. 1, we added two new cases: γ Fe-Pd and γ Fe-Ni. The qualitative and quantitative agreement are good in both cases. Fig. 1 shows the heat of formation as a function of composition for these two disordered alloys.

In table 5 we address the issue of stability of the parameters Δ with respect to the choice of basis set of ordered compounds in the cluster expansion for a Cr-V alloy⁴. The different choices are related to two possible ordered structures at 50 % composition (B2 and B32) and the corresponding pair multisite correlation functions (ξ_2 and ξ_3). We will denote the cases studied as follows: (i) B32-\(\xi_2\):includes the B32 ordered structure and the ξ_2 correlation function (nearest-neighbor pair); (ii) $B32-\xi_3$; $B2-\xi_2$ and (iv) $B2+B32-\xi_2+\xi_3$ (see Ref. 4 for details). We note that the ambiguity in the values of such parameters is a consequence of the cluster expansion method and basis set chosen. Otherwise, we would expect to be able to define a unique set of parameters Δ for different alloys if no approximate schemes (for example. ab initio calculations) were involved in the theoretical determination of the property of choice. Figure 2 displays some results for the heat of formation of the Cr-V alloy (see Ref. 4 for a more detailed discussion). The several curves shown correspond to different choices of the basis set chosen, although the same experimental input is used in all cases. Obviously, the extreme difference in behavior of the heat of formation is purely a consequence of the basis set used and not of the formalism presented here. Actually, the parameters obtained for different basis sets are fairly stable: the parameters Δ play the role of perturbations on the ECT parameter α (see table 1 and 3), giving a net change in α of

Element	Cohesive	Lattice	P	- 1	α	λ
1	Energy	Constant				
Al	3.34	4.05	4	0.336	2.105	0.944
Cu	3.50	3.615	6	0.272	2.935	0.765
Ag	2.96	4.086	8	0.269	3.337	0.756
Au	3.78	4.078	10	0.236	4.339	0.663
Ni	4.435	3.524	6	0.270	3.015	0.759
Ir	6.94	3.84	10	0.235	4.408	0.661
Pd	3.94	3.89	8	0.237	3.612	0.666
Pt	5.85	3.92	10	0.237	4.535	0.666
Fe.	4.27	3.57	6	0.279	2.963	0.784

Table 1: Experimental input: Cohesive energy (in eV), lattice parameter (in A). ECT parameters: p, l (in A). α (in A⁻¹) and λ (in A) for several fcc elements.

the order of 0.01%. Thus in spite of the ability to obtain quantitatively accurate predictions in many cases it would be desirable to base the values of Δ on first-principles calculations.

i de la companya del companya de la companya del companya de la co				
A-B	Δ_{AB}	Δ_{BA}		
Ag-Al	0.0475	-0.0499		
Ag-Au	-0.0333	-0.0227		
Ag-Cu	-0.0391	-0.0308		
Ag-Pd	-0.0451	-0.0178		
Al-Au	-0.0501	-0.0853		
Al-Cu	-0.0526	-0.0626		
Al-Ni	-0.0657	-0.0861		
Au-Cu	-0.0513	-0.0604		
Au-Ni	-0.0506	-0.0622		
Au-Pd	-0.0460	-0.0345		
Cu-Fe	0.0495	0.0638		
Cu-Ni	-0.0163	0.0309		
Cu-Pd	-0.0431	-0.0495		
Cu-Pt	-0.0585	-0.0441		
Fe-Ni	-0.0106	-0.0320		
Fe-Pd	-0.0229	-0.0584		
Ni-Pd	-0.0396	-0.0478		
Ni-Pt	-0.0609	-0.0537		

Table 2: Parameters Δ_{AB} and Δ_{BA} for several fcc binary alloys.

Element	Cohesive	Lattice	р	l	α	λ
	Energy	Constant				
W	8.66	3.16	10	0.274	4.232	0.770
Ta	8.10	3.30	10	0.325	3.905	0.914
Mo	6.82	3.15	8	0.262	3.420	0.736
Nb	7.57	3.30	8	0.341	3.243	0.958
V	5.31	3.03	6	0.305	2.726	0.857
Cr	4.10	2.88	6	0.254	2.889	0.714
Fe	4.29	2.86	6	0.277	3.124	0.770
Li	1.63	3.491	2	0.589	1.049	1.66
Na	1.113	4.225	4	0.578	1.359	1.62
K	0.934	5.225	6	0.694	1.528	1.95
Rb	0.852	5.585	8	0.651	1.937	1.83
Cs	0.804	6.045	10	0.757	2.115	2.13

Table 3: Experimental input: Cohesive energy (in eV), lattice parameter (in A). ECT parameters: p, l (in A), α (in A⁻¹) and λ (in A) for several bcc elements.

A-B	Δ_{AB}	Δ_{BA}
Cr-Fe	0.0465	0.0285
Cr-Mo	-0.02447	-0.0090
Cr-V	-0.0246	-0.0232
Fe-V	0.0998	-0.07168

Table 4: Parameters Δ_{AB} and Δ_{BA} for several bcc binary alloys.

Basis	Δ_{AB}	Δ_{BA}
i	-0.0242	-0.0228
ii	-0.0246	-0.0232
iii	-0.0232	-0.0222
iv	-0.0237	-0.0225

Table 5: Parameters Δ_{AB} and Δ_{BA} for different basis sets used in the cluster expansion (see Ref. 4) for Cr-V.

References

¹Guillermo Bozzolo and John Ferrante, N.A.S.A. Technical Publication 3155 (1991); Guillermo Bozzolo, John Ferrante and John R. Smith, Phys. Rev. **B45** 493 (1992)

²John R. Smith and Amitava Banerjea, Phys. Rev. **B37** 10411 (1988); John R. Smith, Tom Perry, Amitava Banerjea, John Ferrante and Guillermo Bozzolo, Phys. Rev. **B44** 6444 (1991)

³Guillermo Bozzolo and John Ferrante, Scripta Met. Mat. 26 1275 (1992)

⁴Guillermo Bozzolo and John Ferrante, Phys. Rev. B 45 (1992) (in press)

⁵Guillermo Bozzolo and John Ferrante, Ultramicroscopy (1992) (in press)

⁶Guillermo Bozzolo and John Ferrante, Scripta Met. Mat. 26 907 (1992)

⁷T. Mohri, J. M. Sanchez and D. de Fontaine, Acta Metall. 33 1171 (1985)

⁸J. W. D. Connolly and A. R. Williams, Phys. Rev. **B27** 5169 (1983)

⁹ K. Terakura, T. Oguchi, T. Mohri and K. Watanabe, Phys. Rev. B 35, 2169 (1987)

- ¹⁰S. Takizawa, K. Terakura and T. Mohri, Phys. Rev. **B39** 5792 (1989)
- ¹¹Z. W. Lu, S.-H. Wei, Alex Zunger, S. Frota-Pessoa and L. G. Ferreira, Phys. Rev. B 44, 512 (1991)
- ¹²R. Hultgren, R. L. Orr, P. D. Anderson and K. K. Kelley in Selected Values of the Thermodynamic Properties of Binary Alloys (Wiley, N.Y., 1963); W. B. Pearson in Handbook of Lattice Spacings and Structures of Metals (Pergamon Press, 1967).

Acknowledgments

We would like to thank Dr. John R. Smith for providing the ECT parameters for the pure elements. G.B. acknowledges partial support from Engineering Directorate, N.A.S.A. Lewis Research Center.

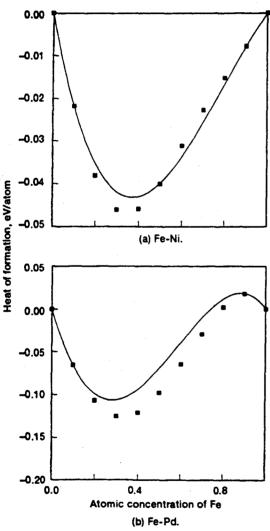


Figure 1.—Experimental (solid squares) and BFS (solid line) values of the heat of formation (in eV/atom) versus concentration.

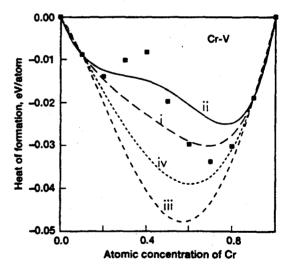


Figure 2.—Experimental (solid squares) and BFS (solid and dashed lines) values of the heat of formation (in eV/atom) versus concentration for Cr-V. The different curves are obtained with different choices of the set of ordered structures considered. See Ref. 4 for a description of the different choices.

REPORT DOCUMENTATION PAGE

Form Approved OMB No. 0704-0188

Public reporting burden for this collection of information is estimated to average 1 hour per response, including the time for reviewing instructions, searching existing data sources, gathering and maintaining the data needed, and completing and reviewing the collection of information. Send comments regarding this burden estimate or any other aspect of this collection of information, including suggestions for reducing this burden, to Washington the Headquarters Services. Directorate for information Operations and Reports, 1215 Jefferson Davis Highlyav, Suite 1204, Affinition VA 222024302, and to the Office of Management and Burdent Project (0704-0188) Washington DC 20503.

1. AGENCY USE ONLY (Leave blank)		I.S. REPORT TYPE AND DAT	res COVERED
1. AGENCY USE ONLY (Leave blank)	October 1992		cal Memorandum
4. TITLE AND SUBTITLE		5. F	UNDING NUMBERS
Determination of Parameter	s of a New Method for		
Predicting Alloy Properties			
6. AUTHOR(S)	WU-505-90-53		
Guillermo Bozzolo and Joh	- Company		
Guinermo Bozzoio and Jon	n remante		
			:
7. PERFORMING ORGANIZATION NA	AME(S) AND ADDRESS(ES)		ERFORMING ORGANIZATION EPORT NUMBER
National Aeronautics and S	pace Administration		
Lewis Research Center			E-7361
Cleveland, Ohio 44135-31	191		
	MOVINA MECCEL AND ADDRECC/ECL	10.	SOURCE MONTORING
9. SPONSORING/MONITORING AGE	NCY NAMES(S) AND AUDRESS(ES)		SPONSORING/MONITORING AGENCY REPORT NUMBER
National Aeronautics and S	pace Administration		
Washington, D.C. 20546-0	0001		NASA TM-105895
11. SUPPLEMENTARY NOTES			
	Corporation, 3001 Aerospace P		
Ferrante, NASA Lewis Res	earch Center, Cleveland, Ohio.	Responsible person, John Fe	rrante, (216) 433–6069.
12s. DISTRIBUTION/AVAILABILITY	CTATEMENT.	125	DISTRIBUTION CODE
128. DISTRIBUTION/AVAILABILITY	SIAIEMENI	120.	DISTRIBUTION CODE
Unclassified - Unlimited		. *	
Subject Category 26			
			•
13. ABSTRACT (Maximum 200 word	(s)		
Recently, a semiempirical n	nethod for alloys based on equiv	alent crystal theory was intro	oduced (Phys. Rev.
	od successfully predicts the conc		
	In this report, a study of the para	ameters of the method is pres	sented, along with new results
for γFe-Pd and γFe-Ni alloy	'S.		
·			•
·			
14. SUBJECT TERMS			15. NUMBER OF PAGES
Alloys: Computational mat	10		
			16. PRICE CODE A02
17. SECURITY CLASSIFICATION	18. SECURITY CLASSIFICATION	19. SECURITY CLASSIFICATION	
OF REPORT	OF THIS PAGE	OF ABSTRACT	
Unclassified	Unclassified	Unclassified	

National Aeronautics and Space Administration

Lewis Research Center Cleveland, Ohio 44135

Official Business Penalty for Private Use \$300

FOURTH CLASS MAIL

ADDRESS CORRECTION REQUESTED





Postage and Fees Paid National Aeronautics and Space Administration NASA 451

